

Specifications


	Platform version			Cab version		
	MF 4707	MF 4708	MF 4709	MF 4707	MF 4708	MF 4709
Engine Performance						
Max hp (kW) power @ 2000rpm	75 (55.9)	85 (62.5)	95 (70.8)	75 (55.9)	85 (62.5)	95 (70.8)
Max torque @ 1600rpm	312	357	355	312	347	355
Engine						
Type/Capacity/No. of Cylinders	AGCO POWER 3.3 Litre, 3 cylinders					
Technology	Electronic injection, Common rail, 4 valves per cylinder, DOC					
Transmission						
Type/ No. of gears	Dyna Synchronshift - 12 x 12					
Gears/ Ranges	6/2					
Shuttle	Mechanical synchronised					
Optional Shuttle	Power Shuttle (Power Control Lever & Comfort Control)					
Min Speed @ 1400rpm	km/h 1.91					
Optional creeper gears	24 x 24					
Min Speed @ 1400rpm* with creeper	km/h 0.14					
Power Take-off						
Operation and control	Independent/Electro hydraulic control					
PTO speed @ engine rpm	540 & 1000 2000					
PTO speed @ engine rpm	540 Eco 1550					
PTO shaft						
Standard	6 splines					
Optional	6 & 21 splines					
Hydraulics						
Auxiliary oil flow	litres/min 65 l/min supplying spoolvalves and linkage					
Max pressure	Bar 200					
Rear linkage						
Maximum lift capacity	kg 3,000					
Lower links	Hook ends (cat 2)					
Brakes						
Type	Electro hydraulic / Oil cooled					
Rear tyres						
Standard	420/85 R 30			420/85 R 34		
Optional	460/85 R30 - 480/70 R 34 - 540/65 R 34					
Capacities						
Fuel tank capacity	litres 105	105	105	120	120	120
AdBlue [®] tank capacity	litres -	-	-	15	15	15
Weight						
2WD**	kg 2900	2900	2900	-	-	-
4WD**	kg 3100	3100	3100	3870	3900	3900

* Not applicable to vehicle

© ISO 1181-4:2016

** Manufacturer's testing ** Standard configuration with full fuel tanks, an operator - 75 kg and the smallest tyres


Dimensions

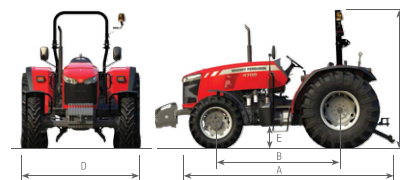

	MF 4708 / MF 4709
4 Wheel Drive	
A – Overall length from front weight frame to rear linkage arms - mm	4454
B – Wheelbase - mm	2250
Turning circle - radius, less brakes - m	7.70
C – Height to top of canopy	2594
D – Width (min/max) - mm	1565 to 1925
E – Maximum ground clearance - mm	460

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.

For even greater productivity a range of optional equipment is available. For full details please consult your local Massey Ferguson dealer.

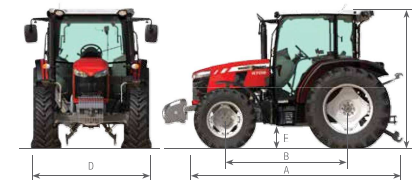

	MF 4707 / MF 4708 / MF 4709
4 Wheel Drive	
A – Overall length from front weight frame to rear linkage arms - mm	4454
B – Wheelbase - mm	2250
Turning circle - radius, less brakes - m	7.70
C – Height to top of Standard roof	2550
C – Height to top of Visio roof	2550
D – Width (min / max) - mm	1565 to 1925
E – Maximum ground clearance - mm	460